


MIC-UNIT

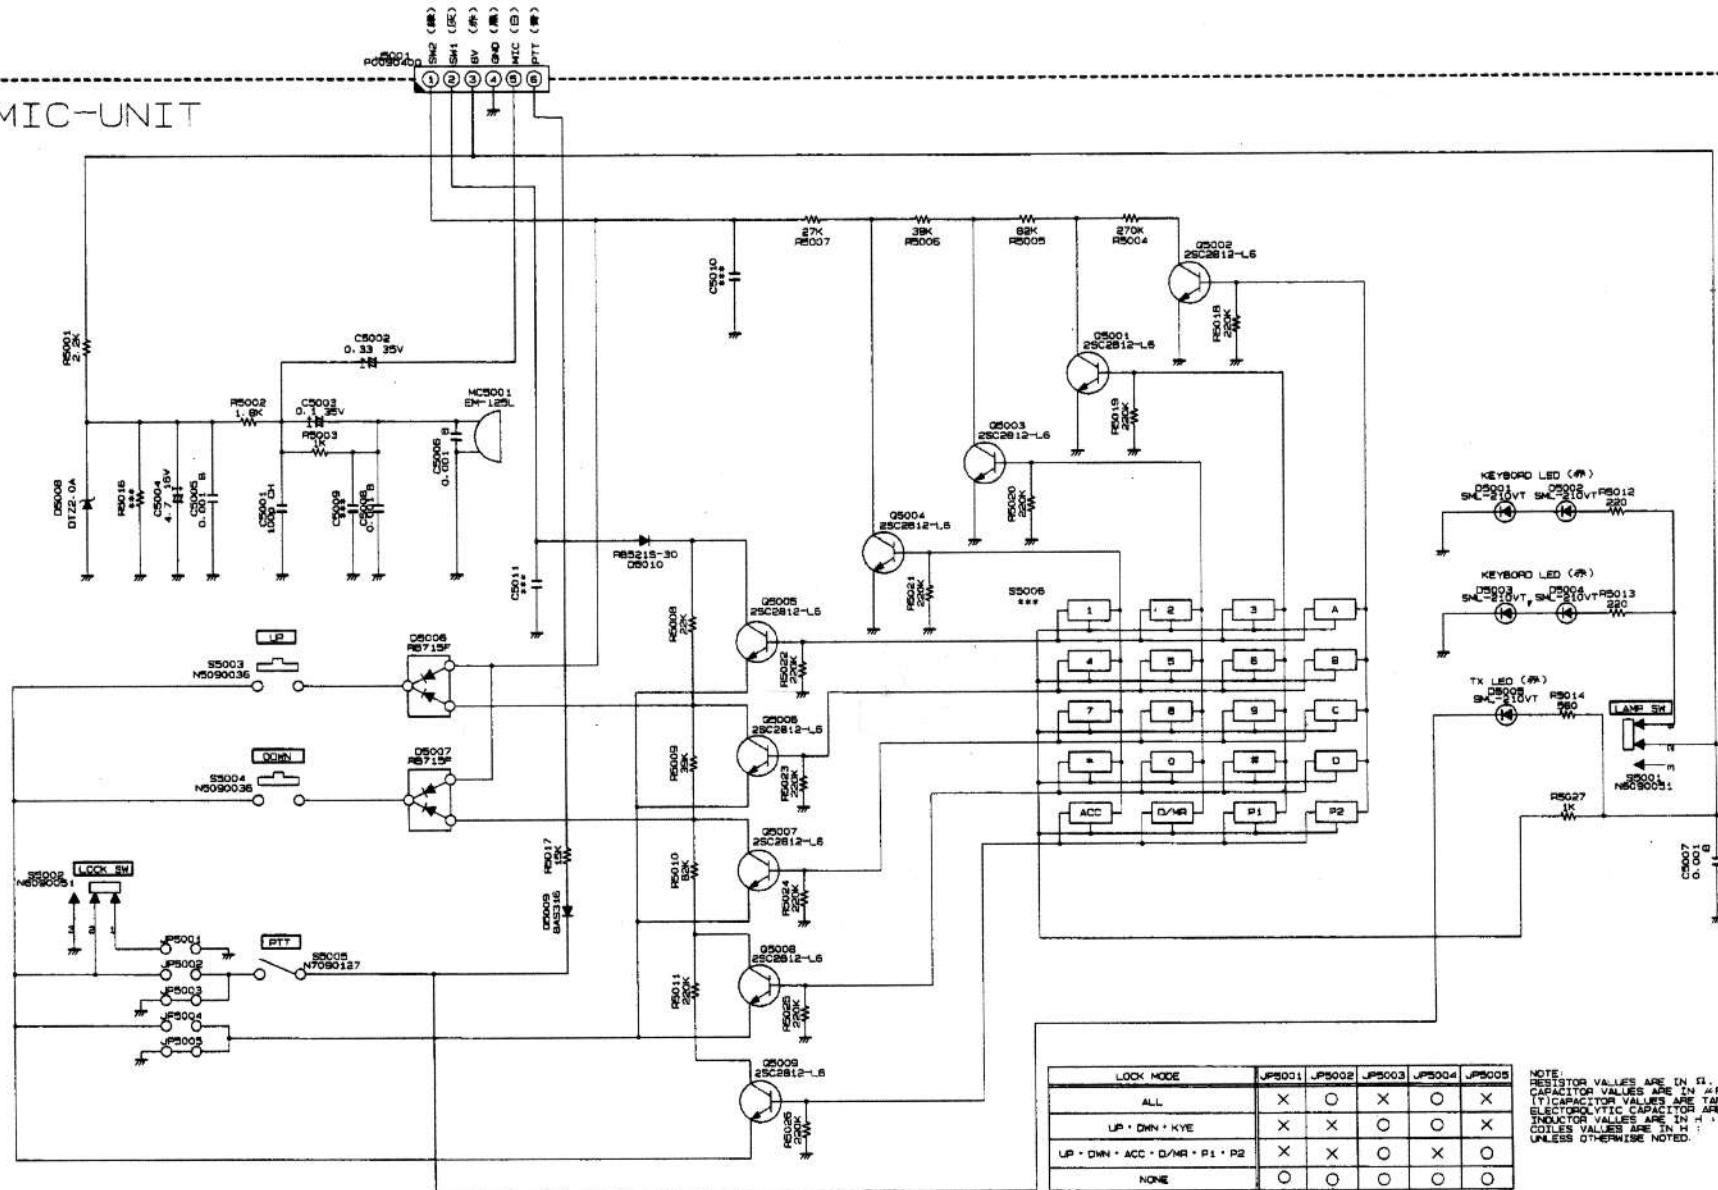

LOCK MODE	JP5001	JP5002	JP5003	JP5004	JP5005
ALL	X	O	X	O	X
UP + DWN + KYE	X	X	O	O	X
UP + DWN + ACC + D/MR + P1 + P2	X	X	O	X	O
NONE	O	O	O	O	O

O : SHORT
X : OPEN

NOTE:
RESISTOR VALUES ARE IN Ω , 1/10W ;
CAPACITOR VALUES ARE IN μ F, 50V ;
(T)CAPACITOR VALUES ARE TANTALUM ;
ELECTROLYTIC CAPACITOR ARE IN μ F, 16V ;
INDUCTOR VALUES ARE IN H ;
COILS VALUES ARE IN H ;
UNLESS OTHERWISE NOTED.

CIRCUIT DIAGRAM	MODEL MH-48
DES. B-AAA43X000/MIC-UNIT	
REF. BP0066500A.cir/001.sht	EDITION
DATE 28 JUL. 1999	UPDATE 09 DEC. 1999
VERTEX STANDARD CO., LTD.	
yaesu1	1901.10.04 11:46